

Apply silicon sealing material continuously prior to installing the step-one protection profile and fix profile with A2 tapping screws or water tight AL-rivets.


From windowsill outreach 150 – **205 415 TSP 15**

From windowsill outreach 210 – **205 421 TSP 21**

Length 6,000 mm

Bovenaanzicht / Top view

Montage / Mounting

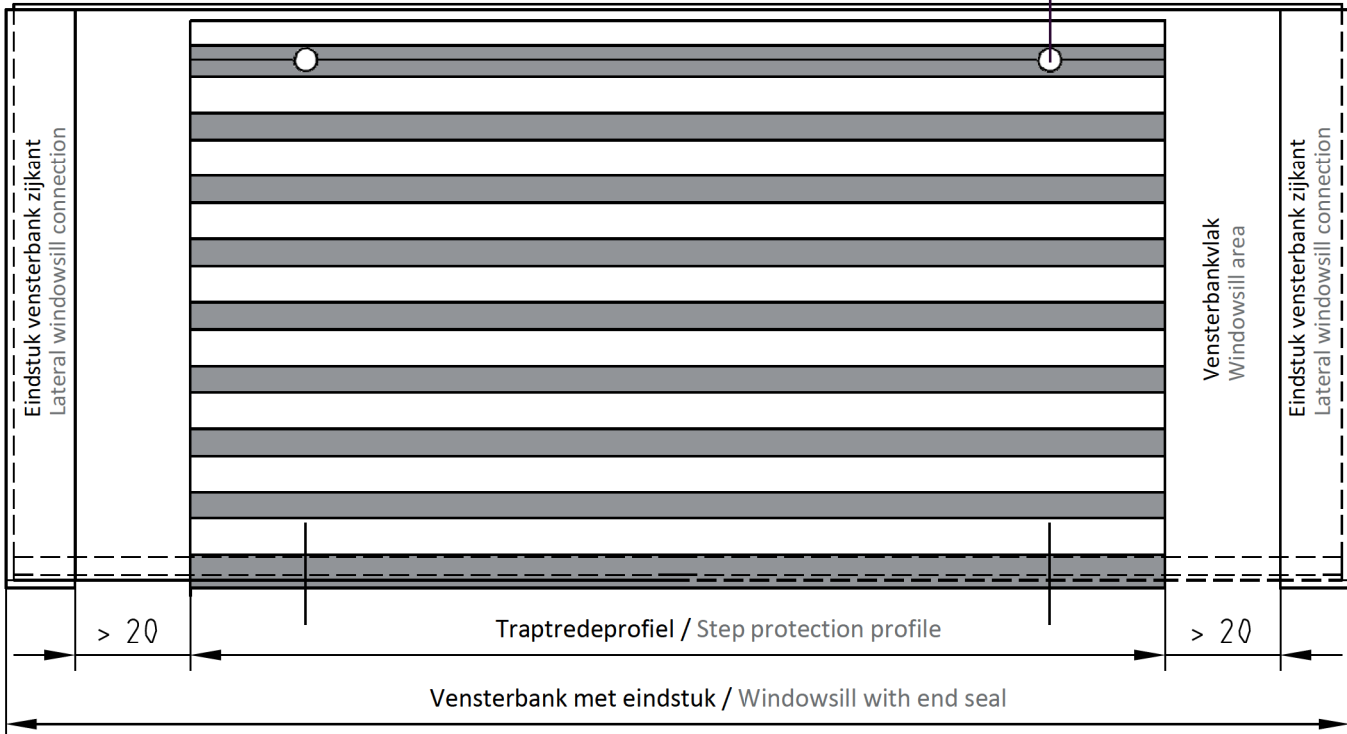

Profiel Profile	Type	oppervlakken op voorraad available surfaces on stock					VE PU
		AU	BC 0	BC 2,5	BC 4	RAL 9016	
Traptredeprofiel 15	205 415	X	X				6 m
Traptredeprofiel 21	205 421	X	X				6 m